
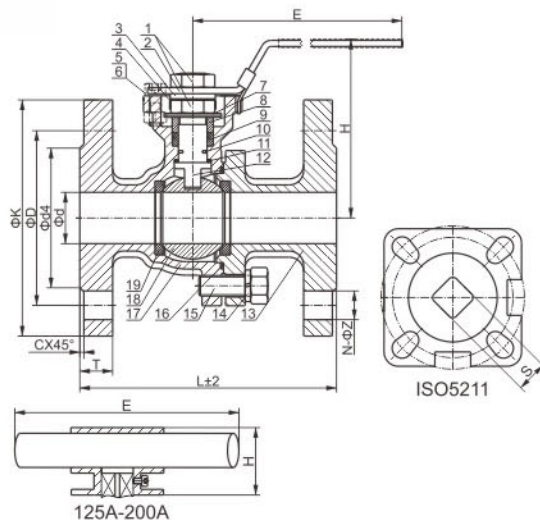


# C210

## 二片式日标高平台法兰球阀 10K

JIS 2PC High Platform Flange Ball Valve 10K

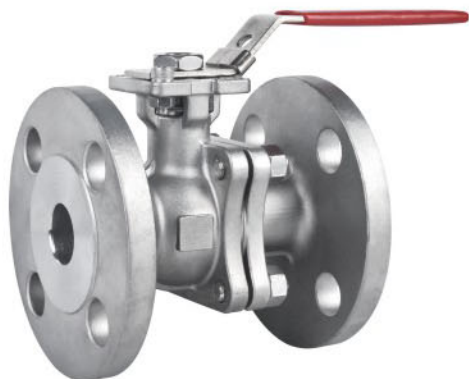

### 技术要求 TECHNICAL REQUIREMENTS

- 设计和制造符合JIS B2071标准
- 检测符合JIS B2003标准
- 面对面尺寸符合JIS B2002
- 法兰尺寸符合JIS B2220标准
- 平台尺寸符合ISO5211标准
- Design & manufacture conform to JIS B2071
- Test & Inspect conform to JIS B2003
- Face to Face dimension conforms to JIS B2002
- Flange dimension conforms to JIS B2220
- The platform size conforms to ISO5211

### 主要技术参数 MAIN TECHNICAL PARAMETER

公称压力 NOMINAL PRESSURE		10K	
试验压力 Test Pressure	壳体 Shell	3.0	MPa
	高压密封 High-Pressure Closure	2.2	
	低压密封 Low-Pressure Closure	0.4~0.7	
适用温度 Applicable Temperature		-29~120°C	
适用介质: 水、油、气 Applicable medium: water, oil, gas			

### 主要零件材料 MAIN PARTS AND MATERIALS

序号 NO.	零件名称 PART NAME	材料 MATERIAL
1	螺母 Nut	SS304
2	手柄 Handle	SS201+PVC
3	垫圈 Washer	SS304
4	防松帽 Anti Loosing Bonnet	SS304
5	螺母 Nut	SS304
6	内六角螺钉 Hex Screws	SS304
7	碟簧 Disc Spring	SS304
8	压盖 Gland	SS304
9	填料 Packing	PTFE
10	O型圈 O-Ring	FKM
11	止推垫片 Thrust Gasket	PTFE
12	阀杆 Stem	SS304/SS316
13	阀盖 Bonnet	SCS13/SCS14
14	弹簧垫圈 Spring Washer	SS304
15	外六角螺栓 Hex Bolts	SS304
16	垫片 Gasket	PTFE
17	阀体 Body	SCS13/SCS14
18	球体 Ball	SS304/SS316
19	阀座 Seat	RPTFE

### 结构尺寸 CONFIGURATION DIMENSION

单位Unit: mm

SIZE	d	d4	K	D	N-ΦZ	C	T	L	ISO5211		S	H	E
15A	15	49	70	95	4-15	1	12	108	F03	F04	9	75	125
20A	20	53	75	100	4-15	1	14	117	F03	F04	9	80	125
25A	25	66	90	125	4-19	1	14	127	F04	F05	11	95	155
32A	32	71	100	135	4-19	2	16	140	F04	F05	11	100	155
40A	38	76	105	140	4-19	2	16	165	F05	F07	14	120	185
50A	50	91	120	155	4-19	2	16	178	F05	F07	14	130	185
65A	65	111	140	175	4-19	2	18	190	F07	F10	17	150	260
80A	80	121	150	185	8-19	2	18	203	F07	F10	17	160	260
100A	100	146	175	210	8-19	2	18	229	F07	F10	19	185	300
125A	125	182	210	250	8-23	2	20	356	F10	F12	27	242	500
150A	150	212	240	280	8-23	2	22	394	F10	F12	27	270	600
200A	200	262	290	330	12-23	2	22	457	F10	F12	27	300	800